

Contact Us:

E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com





Control or Auxiliary Cables SIZE 1.5 mm² (Stranded)

CU/XLPE/SWA/PVC – BS 5467

The Control Cable are suitable for the wiring of electrical controlling equipment and instrument, monitoring and controlling return circuit, electrical protection and measurement in power distribution unit under the circumstance that the rated voltage is up to 600/1000V(A.C.).

Construction :

- 1) Copper cond PVC/XLPE insulated and PVC sheathed control cable
 - 2) Copper cond PVC/XLPE insulated and PVC sheathed control cable with braided shield
 - 3) Copper cond class 5 PVC/XLPE insulated and PVC sheathed flexible control cable
 - 4) Copper cond calss 5 PVC/XLPE insulated and PVC sheathed flexible control cable with braided shield
 - 5) Copper cond PVC/XLPE insulated and PVC sheathed control cable with steel tape/steel wire STA/SWA armouring
- Rated voltage: 450/750v,0.6/1kV, Number of cores: 2-61~4-10

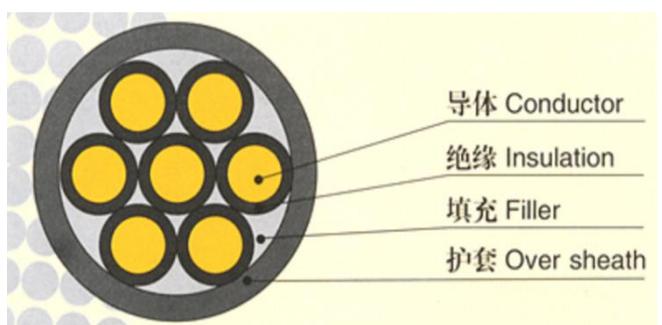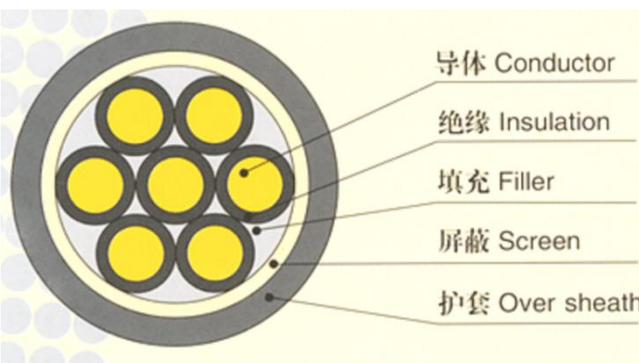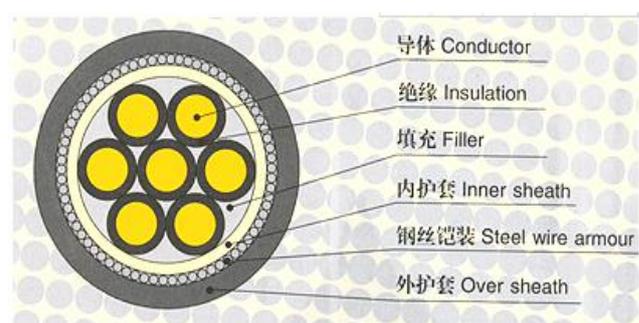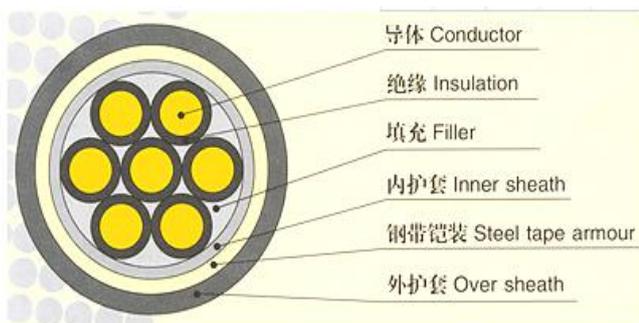



Contact Us:

E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com

DIMENSIONS & WEIGHTS - SIZE 1.5 mm² (Stranded)

CU/XLPE/SWA/PVC – BS 5467

CU CONDUCTOR, XLPE INSULATED, STEEL WIRE ARMoured, PVC

SHEATHED

Nominal Area of Conductor	Nominal Thickness of Insulation	Nominal Thickness of Extruded Bedding	Nominal Diameter of Armour Wire	Nominal Thickness of Outer Sheath	Approx. Overall Diameter	Approx. Cable Weight for CU Cable	Approx. Cable Weight for AL Cable	Packing Length (Standard)
mm ²	mm	mm	mm	mm	mm	kg/km	kg/km	mtrs
6	0.6	0.8	0.9	1.4	16.0	420	1000	1000
7	0.6	0.8	0.9	1.4	16.0	435	1000	1000
9	0.6	0.8	1.25	1.5	18.5	645	1000	1000
12	0.6	0.8	1.25	1.5	19.5	740	1000	1000
19	0.6	0.8	1.25	1.6	22.5	975	1000	1000
21	0.6	1.0	1.6	1.7	24.5	1220	1000	1000
27	0.6	1.0	1.6	1.7	27.0	1450	1000	1000
37	0.6	1.0	1.6	1.7	29.5	1740	1000	1000
48	0.6	1.0	1.6	1.8	33.5	2100	500	1000