

## Contact Us:

E-mail:[info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

Phone/Whatsapp/WeChat:+86 18625503172


[www.qingzhou-cable.com](http://www.qingzhou-cable.com)

# German DIN 48201 Part 6 Standard All Aluminum Alloy Conductor (AAAC) Cables

## Application

AAAC is mainly used as bare overhead transmission cable and as primary and secondary distribution cable. It is also suitable for laying across basins, rivers and valleys where special geographical features exist.

## Construction

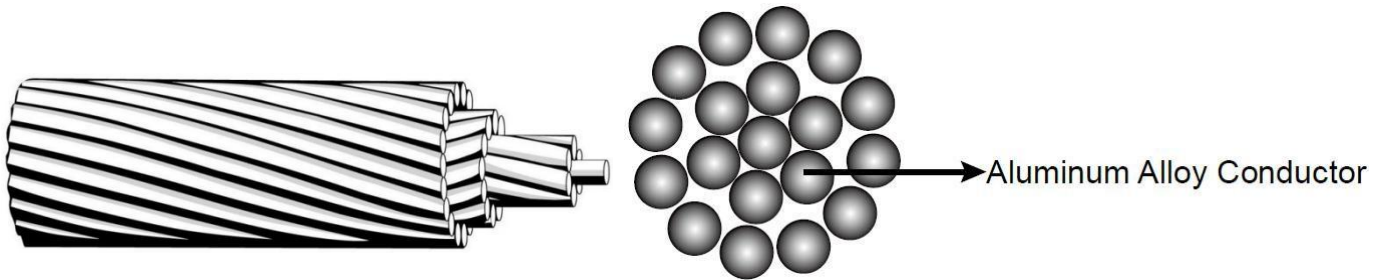

AAAC cable consists of aluminum alloy wires. The aluminum alloy wires are concentrically stranded.

This section deals with heat-treatable magnesium silicon type aluminium alloys to the applicable International Standard, the electrical and mechanical properties of which all fall within the values suggested by relevant standard.

Conductors to all other recognized specifications can also be supplied. The alloys referred to have higher strength but lower conductivity than pure aluminium.

Being lighter, alloy conductors can sometimes be used to advantage in place of the more conventional ACSR; Having lower breaking loads than the latter, their use becomes particularly favourable when ice and wind loadings are low.

## Electrical Properties

Density:20°C

2.70 kg/dm

Temperature Coefficient:20°C

0.00360 (°C)

Resistivity:20°C

0.0326 Ohms mm<sup>2</sup>/m



## Contact Us:

E-mail:[info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

Phone/Whatsapp/WeChat:+86 18625503172

[www.qingzhou-cable.com](http://www.qingzhou-cable.com)

Linear Expansivity

$23 \times 10^{-6} (^{\circ}\text{C})$

## Service Conditions

Ambient Temperature	-5°C - 50°C
Wind Pressure	80 - 130kg/m <sup>2</sup>
Seismic Acceleration	0.12 - 0.05g
Isokeraunic Level	10 - 18
Relative Humidity	5 - 100%

## Construction Parameters

### DIN 48201 Part 6

Nominal Area		Stranding	Overall Diameter	Weight	Rated Strength	Electrical Resistance	Current Rating*
Nominal	Theorical						
mm <sup>2</sup>	mm <sup>2</sup>	No.×mm	mm	kg/km	KN	Ω/Km	A
16	15.89	7/1.70	5.1	43	4.44	2.0742	78
25	24.25	7/2.10	6.3	66	6.77	1.3593	102
35	34.36	7/2.50	7.5	94	9.6	0.9591	126
50	49.48	7/3.00	9	135	13.82	0.666	158
50	48.35	19/1.80	9	133	13.5	0.6849	156
70	65.81	19/2.10	10.5	181	18.38	0.5032	189
95	93.27	19/2.50	12.5	256	26.05	0.3551	234
120	116.99	19/2.80	14	322	32.68	0.2831	269
150	147.11	37/2.25	15.8	406	41.09	0.2256	309
185	181.62	37/2.50	17.5	500	50.73	0.1828	352
240	242.54	61/2.25	20.3	670	67.74	0.1371	420
300	299.43	61/2.50	22.5	827	83.63	0.111	477



## Contact Us:

E-mail:[info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

Phone/Whatsapp/WeChat:+86 18625503172

[www.qingzhou-cable.com](http://www.qingzhou-cable.com)

400	400.14	61/2.89	26	1104	111.76	0.0831	568
500	499.83	61/3.23	29.1	1379	139.6	0.0665	649
625*	626.2	91/2.96	32.6	1732	174.9	0.0531	742
800*	802.09	91/3.35	36.9	2218	224.02	0.0415	857
1000*	999.71	91/3.74	41.1	2767	279.22	0.0333	971

\* The items marked with "\*" are not in our current product range and the details are for information only.

(\*) Note: The values of current rating mentioned in above Table are based on wind velocity of 0.6 metre/second, solar heat radiation of 1200 watt/metre<sup>2</sup>, ambient temperature of 50° C & conductor temperature of 80°C.

## Technical Data

Code	AL Nominal Area	Maximum Resistance DC at 20o		Current Rating	
				Temperate	Tropical
	mm <sup>2</sup>	Ω / km	Ω / 1000ft	Amp	Amp
-	-	2.87	0.873	90	73
Box	-	1.79	0.544	121	98
Acacia	-	1.4	0.426	140	114
Almond	25	1.11	0.339	162	131
Ceda	30	0.944	0.288	180	145
-	40	0.794	0.242	200	162
Fir	50	0.7	0.213	217	175
Hazel	100	0.559	0.17	250	201
Pine	-	0.467	0.142	279	224
-	-	0.398	0.121	309	247
Willow	150	0.373	0.114	322	258
-	175	0.347	0.106	337	270



## Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

[www.qingzhou-cable.com](http://www.qingzhou-cable.com)

-	300	0.308	0.0938	343	290
Oak	-	0.282	0.0859	384	307
-	-	0.282	0.086	385	307
Mulberry	-	0.222	0.0676	448	356
Ash	-	0.185	0.0565	501	398
Elm	-	0.159	0.048	553	438
Poplar	-	0.14	0.0427	598	473
-	-	0.124	0.0337	647	511
Sycamore	-	0.111	0.0377	694	547
Upas	-	0.0925	0.0282	776	610
-	-	0.0794	0.0242	854	669
Yew	-	0.0698	0.0213	925	723