



Contact Us:

E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:+86 18625503172


www.qingzhou-cable.com

IEC 61089 Standard All Aluminum Conductor (AAC) Cables bare

Application

AAC conductor is also known as aluminum stranded conductor which are used in urban areas where spans are usually short but high conductivity is required and are in common use on overhead lines for in low, medium and high voltage. The excellent corrosion resistance of aluminium has made AAC a conductor of choice in coastal areas. Although aluminium-to-copper connections can be made, it is better to use aluminium conductors for service connections, as various forms of covered cable are available for this purpose.

Construction

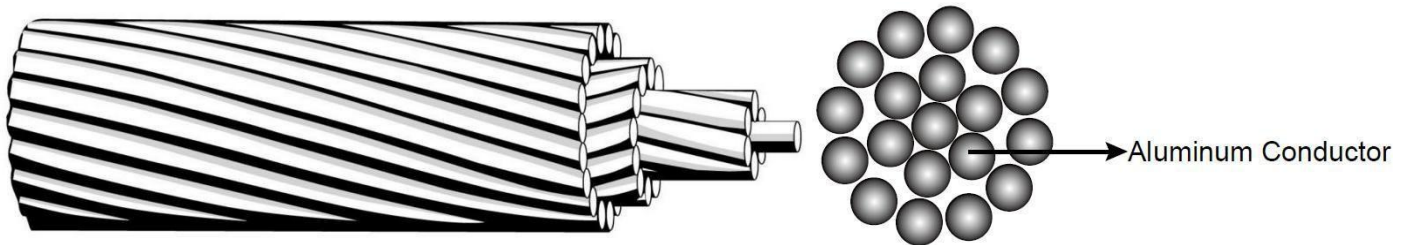

Concentric lay stranded Aluminium Conductor (AAC) is manufactured from electrolytically refined aluminium with a minimum purity of 99.7%. and made up of one or more strands of hard drawn 1350 aluminum alloy.

Electrical Properties

Density:20°C	2.703 kg/dm
Temperature Coefficient:20°C	0.00403 (°C)
Resistivity:20°C	0.028264
Linear Expansivity	23 x10 ⁻⁶ (°C)

Service Conditions



Contact Us:

E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:+86 18625503172

www.qingzhou-cable.com

Ambient Temperature -5°C - 50°C

Wind Pressure 80 – 130kg/m²

Seismic Acceleration 0.12 - 0.05g

Isokeraunic Level 10 – 18

Relative Humidity 5 – 100%

Construction Parameters

IEC 61089

Code	Nominal Area	Stranding	Overall Diameter	Weight	Rated Strength	Electrical Resistance	Current Rating*
	mm ²	No.×mm	mm	kg/km	KN	Ω/Km	A
10	10	7/1.35	4.05	27.4	1.95	2.8633	62
16	16	7/1.71	5.13	43.8	3.04	1.7896	84
25	25	7/2.13	6.39	68.4	4.5	1.1453	110
40	40	7/2.70	8.1	109.4	6.8	0.7158	147
63	63	7/3.39	10.17	172.3	10.39	0.4545	195
100	100	19/2.59	12.95	274.8	17	0.2877	259
125	125	19/2.89	14.45	343.6	21.25	0.2302	297
160	160	19/3.27	16.35	439.8	26.4	0.1798	345
200	200	19/3.66	18.3	549.7	32	0.1439	396
250	250	19/4.09	20.45	687.1	40	0.1151	454
315	315	37/3.29	23.03	867.9	51.97	0.0916	522
400	400	37/3.71	25.97	1102	64	0.0721	603
450	450	37/3.94	27.58	1239.8	72	0.0641	647
500	500	37/4.15	29.05	1377.6	80	0.0577	688
560	560	37/4.39	30.73	1542.9	89.6	0.0515	736



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

630	630	61/3.63	32.67	1738.3	100.8	0.0458	789
710	710	61/3.85	34.65	1959.1	113.6	0.0407	845
800	800	61/4.09	36.81	2207.4	128	0.0361	905
900	900	61/4.33	38.97	2483.3	144	0.0321	967
1000	1000	61/4.57	41.13	2759.2	160	0.0289	1026
1120*	1120	91/3.96	43.56	3093.5	179.2	0.0258	1091
1250*	1250	91/4.18	45.98	3452.6	200	0.0231	1157
1400*	1400	91/4.43	48.73	3866.9	224	0.0207	1226
1500*	1500	91/4.58	50.38	4143.1	240	0.0193	1270

* The items marked with "*" are not in our current product range and the details are for information only.

(*) Note: The values of current rating mentioned in above Table are based on wind velocity of 0.6 metre/second, solar heat radiation of 1200 watt/metre², ambient temperature of 50° C & conductor temperature of 80°C.

Technical Data

Numbers of Wires	Final Modules of Elasticity		Coefficient of linear Expansion	
	Kg/mm ²	lb/in ²	1/Co	1/Fo
7	6000	8.5 x10 ⁶	23.0 x10 ⁻⁶	112.8 x10 ⁻⁶
19	5700	8.1 x10 ⁶	23.0 x10 ⁻⁶	112.8 x10 ⁻⁶
37	5700	8.1 x10 ⁶	23.0 x10 ⁻⁶	112.8 x10 ⁻⁶
61	5500	7.8 x10 ⁶	23.0 x10 ⁻⁶	112.8 x10 ⁻⁶
91	5500	7.8 x10 ⁶	23.0 x10 ⁻⁶	112.8 x10 ⁻⁶