

Contact Us:

E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com

Control or Auxiliary Cables SIZE 1.5 mm² (Stranded)





CU/XLPE/PVC – IEC-60502 Part 1(UNARMoured)

The Control Cable are suitable for the wiring of electrical controlling equipment and instrument, monitoring and controlling return circuit, electrical protection and measurement in power distribution unit under the circumstance that the rated voltage is up to 600/1000V(A.C.).

Construction :

- 1) Copper cond PVC/XLPE insulated and PVC sheathed control cable
- 2) Copper cond PVC/XLPE insulated and PVC sheathed control cable with braided shield
- 3) Copper cond class 5 PVC/XLPE insulated and PVC sheathed flexible control cable
- 4) Copper cond calss 5 PVC/XLPE insulated and PVC sheathed flexible control cable with braided shield
- 5) Copper cond PVC/XLPE insulated and PVC sheathed control cable with steel tape/steel wire STA/SWA armouring

Rated voltage: 450/750v,0.6/1kV, Number of cores: 2-61~4-10

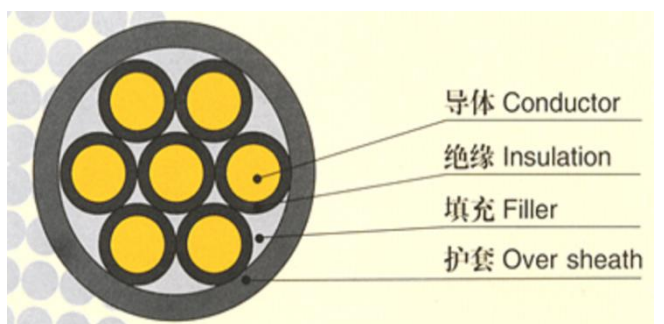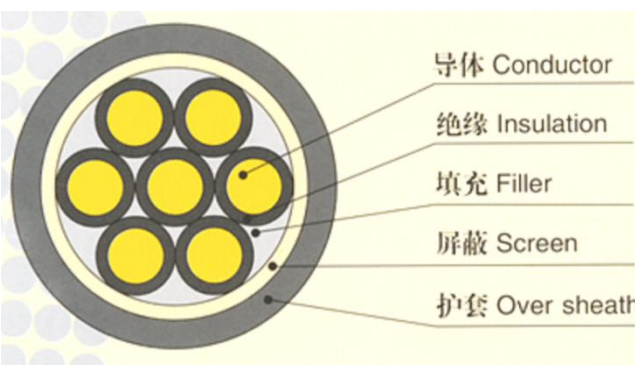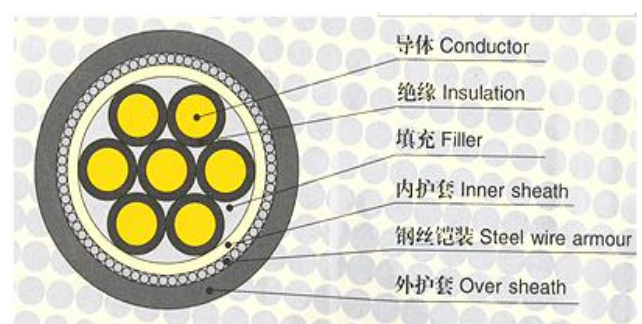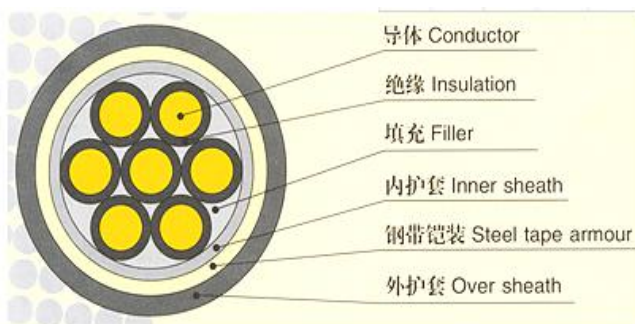



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

DIMENSIONS & WEIGHTS - SIZE 1.5 mm²(Stranded)

CU/XLPE/PVC – IEC-60502 Part 1

CU CONDUCTOR, XLPE INSULATED, PVC SHEATHED (UNARMoured)

Nominal Area of Conductor	Nominal Thickness of Insulation	Nominal Thickness of Outer Sheath	Approx. Overall Diameter	Approx. Cable Weight	Packing Length (Standard)
mm ²	mm	mm	mm	kg/km	kg/km
6	0.7	1.8	13.0	230	1000
7	0.7	1.8	13.0	245	1000
9	0.7	1.8	15.0	315	1000
12	0.7	1.8	17.0	375	1000
19	0.7	1.8	19.0	535	1000
21	0.7	1.8	20.0	585	1000
27	0.7	1.8	23.0	720	1000
37	0.7	1.8	25.0	940	1000
48	0.7	1.8	29.0	1185	1000