

Contact Us:

E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com

Control or Auxiliary Cables SIZE 2.5 mm² (Stranded)





CU/PVC/SWA/PVC – BS 6346

The Control Cable are suitable for the wiring of electrical controlling equipment and instrument, monitoring and controlling return circuit, electrical protection and measurement in power distribution unit under the circumstance that the rated voltage is up to 600/1000V(A.C.).

Construction :

- 1) Copper cond PVC/XLPE insulated and PVC sheathed control cable
- 2) Copper cond PVC/XLPE insulated and PVC sheathed control cable with braided shield
- 3) Copper cond class 5 PVC/XLPE insulated and PVC sheathed flexible control cable
- 4) Copper cond calss 5 PVC/XLPE insulated and PVC sheathed flexible control cable with braided shield
- 5) Copper cond PVC/XLPE insulated and PVC sheathed control cable with steel tape/steel wire STA/SWA armouring

Rated voltage: 450/750v,0.6/1kV, Number of cores: 2-61~4-10

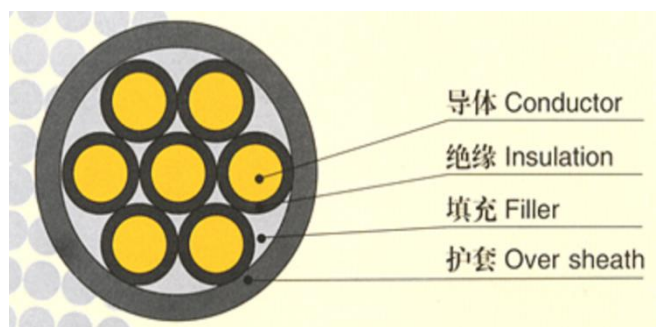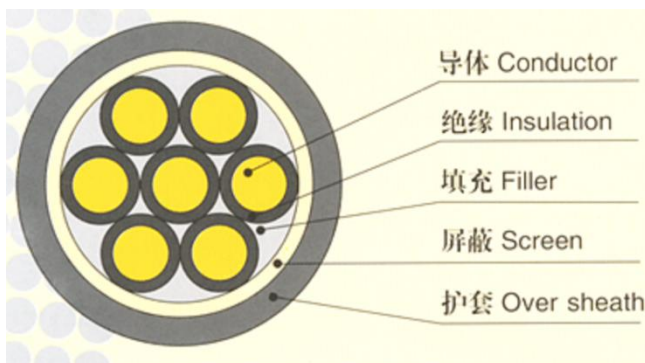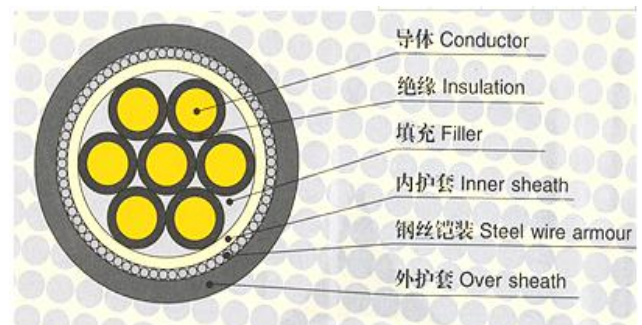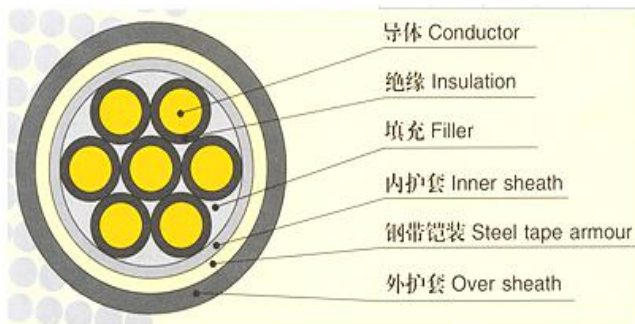



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

DIMENSIONS & WEIGHTS - SIZE 2.5 mm² (Stranded)

CU/PVC/SWA/PVC – BS 6346

CU CONDUCTOR, PVC INSULATED, STEEL WIRE ARMoured, PVC SHEATHED

Nominal Area of Conductor	Nominal Thickness of Insulation	Nominal Thickness of Extruded Bedding	Nominal Diameter of Armour Wire	Nominal Thickness of Outer Sheath	Approx. Overall Diameter	Approx. Cable Weight	Packing Length (Standard)
mm ²	mm	mm	mm	mm	mm	kg/km	mtrs
6	0.7	0.8	1.25	1.5	19.0	670	1000
7	0.7	0.8	1.25	1.5	19.0	700	1000
9	0.7	0.8	1.25	1.6	21.5	890	1000
12	0.7	0.8	1.25	1.6	23.5	1030	1000
19	0.7	1.0	1.6	1.7	28.0	1575	1000
21	0.7	1.0	1.6	1.8	29.0	1700	1000
27	0.7	1.0	1.6	1.8	32.0	2025	1000
37	0.7	1.0	1.6	1.9	35.5	2525	500
48	0.7	1.2	2.0	2.1	41.0	3445	500