

Contact Us:

E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com





Control or Auxiliary Cables SIZE 2.5 mm² (Stranded)
CU/XLPE/SWA/PVC – BS 5467

The Control Cable are suitable for the wiring of electrical controlling equipment and instrument, monitoring and controlling return circuit, electrical protection and measurement in power distribution unit under the circumstance that the rated voltage is up to 600/1000V(A.C.).

Construction :

- 1) Copper cond PVC/XLPE insulated and PVC sheathed control cable
- 2) Copper cond PVC/XLPE insulated and PVC sheathed control cable with braided shield
- 3) Copper cond class 5 PVC/XLPE insulated and PVC sheathed flexible control cable
- 4) Copper cond calss 5 PVC/XLPE insulated and PVC sheathed flexible control cable with braided shield
- 5) Copper cond PVC/XLPE insulated and PVC sheathed control cable with steel tape/steel wire STA/SWA armouring

Rated voltage: 450/750v,0.6/1kV, Number of cores: 2-61~4-10

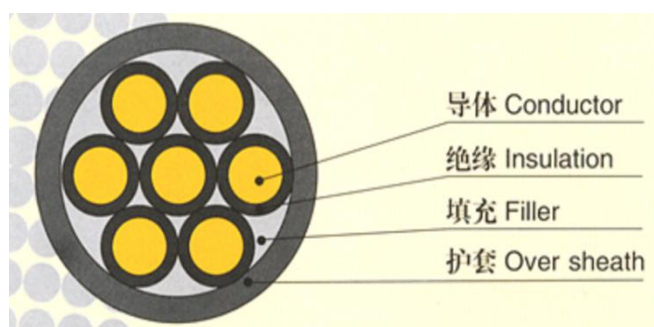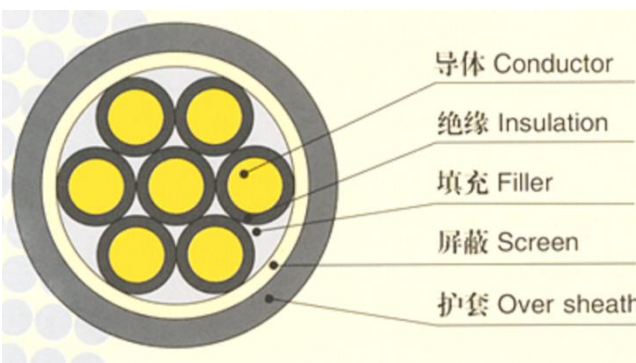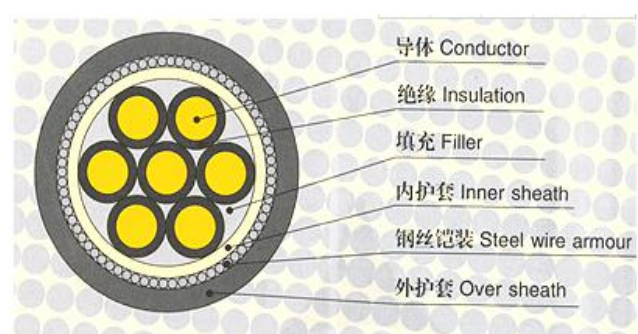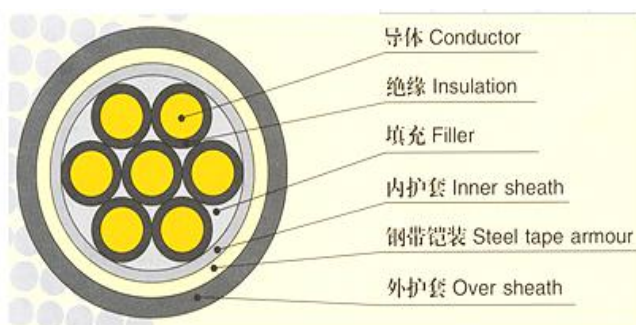



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

DIMENSIONS & WEIGHTS - SIZE 2.5 mm² (Stranded)

CU/XLPE/SWA/PVC – BS 5467

CU CONDUCTOR, XLPE INSULATED, STEEL WIRE ARMoured, PVC SHEATHED

Nominal Area of Conductor	Nominal Thickness of Insulation	Nominal Thickness of Extruded Bedding	Nominal Diameter of Armour Wire	Nominal Thickness of Outer Sheath	Approx. Overall Diameter	Approx. Cable Weight for CU Cable	Approx. Cable Weight for AL Cable	Packing Length (Standard)
mm ²	mm	mm	mm	mm	mm	kg/km	kg/km	mtrs
6	0.7	0.8	0.9	1.4	17.5	515	1000	1000
7	0.7	0.8	0.9	1.4	17.5	540	1000	1000
9	0.7	0.8	1.25	1.6	20.0	795	1000	1000
12	0.7	0.8	1.25	1.6	21.5	930	1000	1000
19	0.7	1.0	1.6	1.7	26.0	1415	1000	1000
21	0.7	1.0	1.6	1.8	27.0	1525	1000	1000
27	0.7	1.0	1.6	1.8	30.0	1815	1000	1000
37	0.7	1.0	1.6	1.8	33.0	2225	500	1000
48	0.7	1.2	2	2.0	38.5	3040	500	1000