



Contact Us:

E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com



600/1000V, PVC Insulated Cables according to IEC 60502-1

Applications

These cables are used for electricity supply in low voltage installation system, They are suitable for installation in indoors and outdoors, in cable ducts, under ground, in power and switching stations, local energy distributions, industrial plants, where there is no risk of mechanical damage.

Construction

Conductors

The conductors shall be either of Class 1 or Class 2 of plain or metal-coated annealed copper or of plain aluminium or aluminium alloy, or of Class 5 of plain or metal-coated copper in accordance with IEC 60228.

Insulation

PVC Insulation material and thickness shall be as per IEC 60502-1, PVC material shall be Type A as per IEC 60502-1.

Colour Code

Colour Code (1)

| | |
|---------|---------------------------------|
| 1 Core | Red or Black |
| 2 Cores | Red, Black |
| 3 Cores | Red, Yellow, Blue |
| 4 Cores | Red, Yellow, Blue, Black |
| 5 Cores | Red, Yellow, Blue, Black, Green |



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

Above 5 Cores Black Cores with White numerals

Colour Code (2)

1 Core Brown or Blue

2 Cores Brown, Blue

3 Cores Brown, Black, Grey

4 Cores Blue, Brown, Black, Grey

5 Cores Green/Yellow, Blue, Brown, Black, Grey

Above 5 Cores Black Cores with White numerals

Other colours can be manufactured upon request.

Assembly / Inner Covering

The inner coverings may be extruded or lapped. For cables with circular cores, except cables with more than five cores, a lapped inner covering shall be permitted only if the interstices between the cores are substantially filled. A suitable binder is permitted before application of an extruded inner covering. The materials used for inner coverings and fillers shall be suitable for the operating temperature of the cable and compatible with the insulating material. For halogen free cables, the inner covering and fillers shall also be halogen free compound.

Armour

Aluminum/galvanized steel/steel wires applied helically over the Inner Covering as per IEC 60502-1, or double aluminum/steel tapes and copper/tinned copper wire can also be manufactured upon request.

Outer Sheath

Outer sheath shall be of extruded PVC Type ST1/ST2 as per IEC 60502-1, Polyethylene type ST3/ST7, Halogen free compound ST8, Polychloroprene, chlorosulfonated polyethylene or similar polymers, type SE1 are also available on request.

Fire Performance of Cable Sheaths

Contact Us:

E-mail: info@qingzhou-cable.com


Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com

Cables can be supplied with special flame retardant PVC outer sheath to comply with the flame test requirements of IEC 60332-3-22, IEC 60332-3-23 and IEC 60332-3-24, Halogen Free material comply to IEC60754-1/2 and IEC 60684-2.

Parameters

Single core (unarmoured)

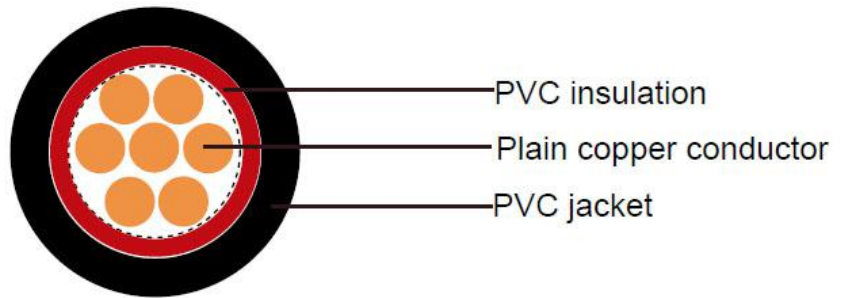

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation Thickness | Nominal Sheath Thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm |
| 1x4 | 2.3 | 1 | 1.4 | 7.1 |
| 1x6 | 2.8 | 1 | 1.4 | 7.6 |
| 1x10 | 3.6 | 1 | 1.4 | 8.4 |
| 1x16 | 4.5 | 1 | 1.4 | 9.3 |
| 1x25 | 5.6 | 1.2 | 1.4 | 10.8 |
| 1x35 | 6.7 | 1.2 | 1.4 | 11.9 |
| 1x50 | 8 | 1.4 | 1.4 | 13.6 |
| 1x70 | 9.4 | 1.4 | 1.4 | 15.1 |
| 1x95 | 11 | 1.6 | 1.5 | 17.2 |
| 1x120 | 12.4 | 1.6 | 1.5 | 18.7 |

Contact Us:


E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | |
|-------|------|-----|-----|------|
| 1x150 | 13.8 | 1.8 | 1.6 | 20.6 |
| 1x185 | 15.3 | 2 | 1.7 | 22.7 |
| 1x240 | 17.5 | 2.2 | 1.8 | 25.4 |
| 1x300 | 19.5 | 2.4 | 1.9 | 28.0 |
| 1x400 | 22.6 | 2.6 | 2.0 | 31.7 |
| 1x500 | 25.2 | 2.8 | 2.1 | 35.0 |
| 1x630 | 28.3 | 2.8 | 2.2 | 38.3 |

Two cores (unarmoured)

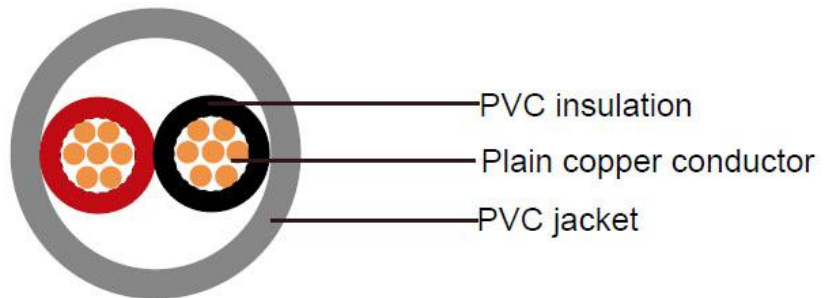

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation Thickness | Nominal Sheath Thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm |
| 2x1.5 | 1.4 | 0.8 | 1.8 | 9.6 |
| 2x2.5 | 1.8 | 0.8 | 1.8 | 10.4 |
| 2x4 | 2.3 | 1 | 1.8 | 12.2 |
| 2x6 | 2.8 | 1 | 1.8 | 13.2 |
| 2x10 | 3.6 | 1 | 1.8 | 14.8 |
| 2x16 | 4.5 | 1 | 1.8 | 16.6 |
| 2x25 | 5.6 | 1.2 | 1.8 | 19.6 |

Contact Us:


E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | |
|-------|------|-----|-----|------|
| 2x35 | 6.7 | 1.2 | 1.8 | 21.8 |
| 2x50 | 8 | 1.4 | 1.8 | 25.2 |
| 2x70 | 9.4 | 1.4 | 1.9 | 28.1 |
| 2x95 | 11 | 1.6 | 2.0 | 32.4 |
| 2x120 | 12.4 | 1.6 | 2.1 | 35.4 |
| 2x150 | 13.8 | 1.8 | 2.2 | 39.2 |
| 2x185 | 15.3 | 2 | 2.4 | 43.3 |
| 2x240 | 17.5 | 2.2 | 2.5 | 48.9 |
| 2x300 | 19.5 | 2.4 | 2.7 | 54.0 |
| 2x400 | 22.6 | 2.6 | 2.9 | 61.5 |

Three cores (unarmoured)

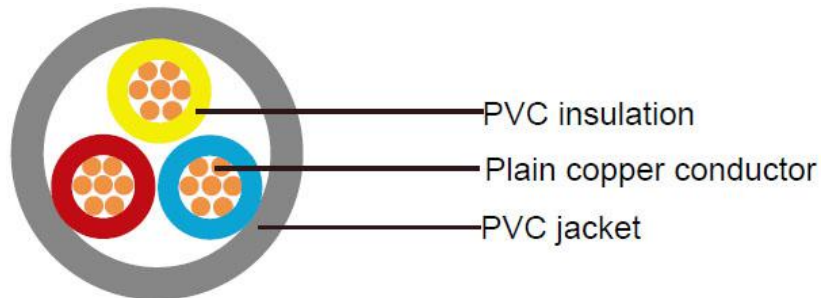

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation Thickness | Nominal Sheath Thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm |
| 3x1.5 | 1.4 | 0.8 | 1.8 | 10.1 |
| 3x2.5 | 1.8 | 0.8 | 1.8 | 10.9 |
| 3x4 | 2.3 | 1 | 1.8 | 12.9 |
| 3x6 | 2.8 | 1 | 1.8 | 13.9 |
| 3x10 | 3.6 | 1 | 1.8 | 15.7 |

Contact Us:


E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | |
|-------|------|-----|-----|------|
| 3x16 | 4.5 | 1 | 1.8 | 17.6 |
| 3x25 | 5.6 | 1.2 | 1.8 | 20.8 |
| 3x35 | 6.7 | 1.2 | 1.8 | 23.2 |
| 3x50 | 8 | 1.4 | 1.8 | 26.9 |
| 3x70 | 9.4 | 1.4 | 1.9 | 30.1 |
| 3x95 | 11 | 1.6 | 2.1 | 34.7 |
| 3x120 | 12.4 | 1.6 | 2.2 | 38.0 |
| 3x150 | 13.8 | 1.8 | 2.3 | 42.1 |
| 3x185 | 15.3 | 2 | 2.5 | 46.5 |
| 3x240 | 17.5 | 2.2 | 2.7 | 52.5 |
| 3x300 | 19.5 | 2.4 | 2.8 | 58.0 |
| 3x400 | 22.6 | 2.6 | 3.1 | 66.1 |

Three cores+1 (unarmoured)

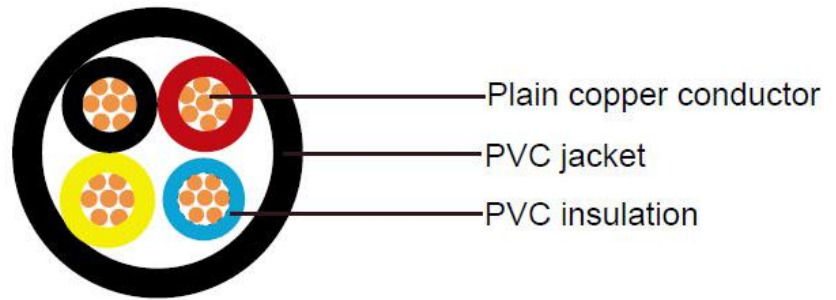

| Nominal Cross Section | Diameter of Conductor (Approx.) | | Nominal Insulation Thickness | | Nominal Sheath Thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|-------|------------------------------|-------|--------------------------|----------------------------|
| | (3)mm | (1)mm | (3)mm | (1)mm | | |
| 3x 16/10 | 4.5 | 3.6 | 1 | 1 | 1.8 | 19.0 |
| 3x 25/16 | 5.6 | 4.5 | 1.2 | 1 | 1.8 | 22.6 |
| 3x 35/16 | 6.7 | 4.5 | 1.2 | 1 | 1.8 | 25.3 |

Contact Us:


E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com

| | | | | | | |
|-----------|------|------|-----|-----|-----|------|
| 3x 50/25 | 8.0 | 5.6 | 1.4 | 1.2 | 1.9 | 29.6 |
| 3x 70/35 | 9.4 | 6.7 | 1.4 | 1.2 | 2.0 | 33.2 |
| 3x 95/50 | 11.0 | 8.0 | 1.6 | 1.4 | 2.2 | 38.4 |
| 3x120/70 | 12.4 | 9.4 | 1.6 | 1.4 | 2.3 | 42.0 |
| 3x150/70 | 13.8 | 9.4 | 1.8 | 1.4 | 2.5 | 46.6 |
| 3x185/95 | 15.3 | 11.0 | 2 | 1.6 | 2.6 | 51.6 |
| 3x240/120 | 17.5 | 12.4 | 2.2 | 1.6 | 2.9 | 58.3 |
| 3x300/150 | 19.5 | 13.8 | 2.4 | 1.8 | 3.1 | 64.5 |
| 3x400/185 | 22.6 | 15.3 | 2.6 | 2 | 3.3 | 73.5 |

Four cores (unarmoured)

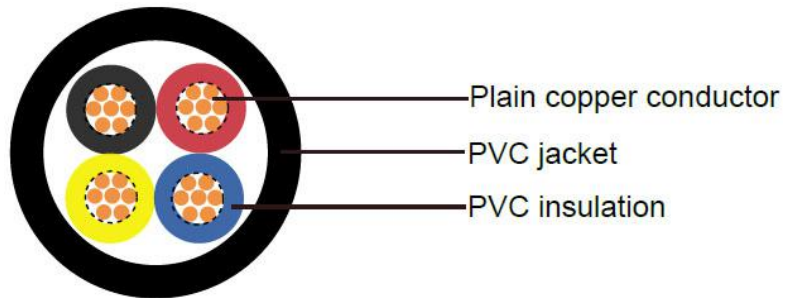

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation Thickness | Nominal Sheath Thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm |
| 4x1.5 | 1.4 | 0.8 | 1.8 | 10.8 |
| 4x2.5 | 1.8 | 0.8 | 1.8 | 11.8 |
| 4x4 | 2.3 | 1 | 1.8 | 14.0 |
| 4x6 | 2.8 | 1 | 1.8 | 15.2 |
| 4x10 | 3.6 | 1 | 1.8 | 17.1 |
| 4x16 | 4.5 | 1 | 1.8 | 19.3 |

Contact Us:


E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | |
|-------|------|-----|-----|------|
| 4x25 | 5.6 | 1.2 | 1.8 | 22.9 |
| 4x35 | 6.7 | 1.2 | 1.8 | 25.6 |
| 4x50 | 8 | 1.4 | 1.9 | 29.9 |
| 4x70 | 9.4 | 1.4 | 2.0 | 33.5 |
| 4x95 | 11 | 1.6 | 2.2 | 38.7 |
| 4x120 | 12.4 | 1.6 | 2.3 | 42.3 |
| 4x150 | 13.8 | 1.8 | 2.5 | 46.9 |
| 4x185 | 15.3 | 2 | 2.6 | 51.9 |
| 4x240 | 17.5 | 2.2 | 2.9 | 58.6 |
| 4x300 | 19.5 | 2.4 | 3.1 | 64.8 |
| 4x400 | 22.6 | 2.6 | 3.3 | 73.8 |

Multi-cores (unarmoured)

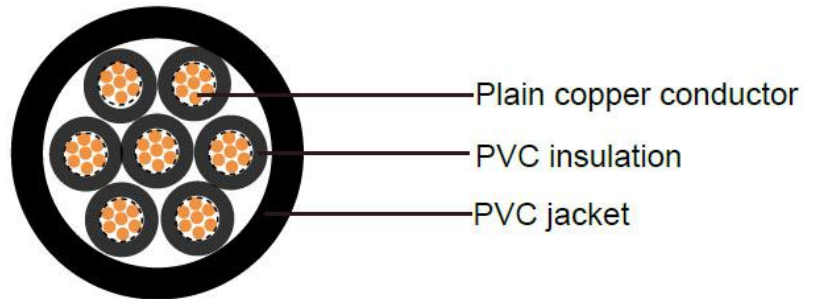

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation Thickness | Nominal Sheath Thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm |
| 5x1.5 | 1.4 | 0.8 | 1.8 | 11.7 |
| 7x1.5 | 1.4 | 0.8 | 1.8 | 12.6 |
| 10x1.5 | 1.4 | 0.8 | 1.8 | 15.6 |
| 12x1.5 | 1.4 | 0.8 | 1.8 | 16.1 |



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | |
|--------|-----|-----|-----|------|
| 14x1.5 | 1.4 | 0.8 | 1.8 | 16.8 |
| 19x1.5 | 1.4 | 0.8 | 1.8 | 18.6 |
| 21x1.5 | 1.4 | 0.8 | 1.8 | 19.5 |
| 24x1.5 | 1.4 | 0.8 | 1.8 | 21.6 |
| 30x1.5 | 1.4 | 0.8 | 1.8 | 22.8 |
| 40x1.5 | 1.4 | 0.8 | 1.8 | 27.7 |
| 48x1.5 | 1.4 | 0.8 | 1.9 | 28.2 |
| 61x1.5 | 1.4 | 0.8 | 1.9 | 30.9 |
| 5x2.5 | 1.8 | 0.8 | 1.8 | 12.8 |
| 7x2.5 | 1.8 | 0.8 | 1.8 | 13.8 |
| 10x2.5 | 1.8 | 0.8 | 1.8 | 17.2 |
| 12x2.5 | 1.8 | 0.8 | 1.8 | 17.7 |
| 14x2.5 | 1.8 | 0.8 | 1.8 | 18.6 |
| 19x2.5 | 1.8 | 0.8 | 1.8 | 20.6 |
| 21x2.5 | 1.8 | 0.8 | 1.8 | 21.6 |
| 24x2.5 | 1.8 | 0.8 | 1.8 | 24.0 |
| 30x2.5 | 1.8 | 0.8 | 1.8 | 25.4 |
| 40x2.5 | 1.8 | 0.8 | 2.0 | 31.1 |
| 48x2.5 | 1.8 | 0.8 | 2.0 | 31.7 |
| 61x2.5 | 1.8 | 0.8 | 2.1 | 34.7 |


Contact Us:

E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

Single core(aluminum wire armoured)

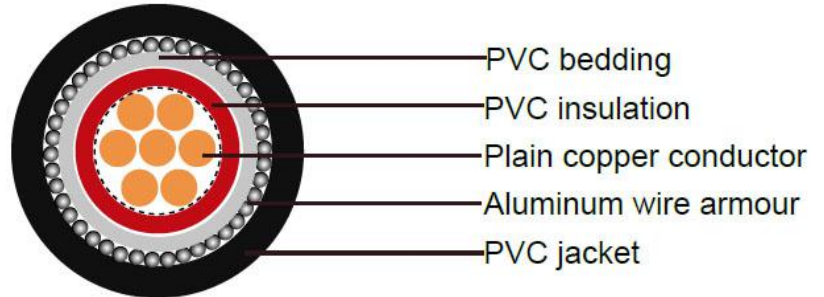

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation thickness | Nominal Inner Covering thickness | Nominal Steel Wire dia. | Nominal Sheath thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|----------------------------------|-------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm | mm | mm |
| 1x4 | 2.3 | 1 | 1.0 | 0.8 | 1.8 | 11.5 |
| 1x6 | 2.8 | 1 | 1.0 | 0.8 | 1.8 | 12.0 |
| 1x10 | 3.6 | 1 | 1.0 | 0.8 | 1.8 | 12.8 |
| 1x16 | 4.5 | 1 | 1.0 | 0.8 | 1.8 | 13.7 |
| 1x25 | 5.6 | 1.2 | 1.0 | 0.8 | 1.8 | 15.2 |
| 1x35 | 6.7 | 1.2 | 1.0 | 1.25 | 1.8 | 17.2 |
| 1x50 | 8.0 | 1.4 | 1.0 | 1.25 | 1.8 | 18.9 |
| 1x70 | 9.4 | 1.4 | 1.0 | 1.25 | 1.8 | 20.3 |
| 1x95 | 11.0 | 1.6 | 1.0 | 1.6 | 1.8 | 23.0 |
| 1x120 | 12.4 | 1.6 | 1.0 | 1.6 | 1.8 | 24.4 |
| 1x150 | 13.8 | 1.8 | 1.0 | 1.6 | 1.8 | 26.2 |
| 1x185 | 15.3 | 2 | 1.0 | 1.6 | 1.9 | 28.2 |
| 1x240 | 17.5 | 2.2 | 1.0 | 1.6 | 1.9 | 31.0 |
| 1x300 | 19.5 | 2.4 | 1.0 | 2.0 | 2.1 | 34.4 |

Contact Us:


E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:[+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | | | |
|-------|------|-----|-----|-----|-----|------|
| 1x400 | 22.6 | 2.6 | 1.2 | 2.0 | 2.2 | 38.6 |
| 1x500 | 25.2 | 2.8 | 1.2 | 2.0 | 2.3 | 41.8 |
| 1x630 | 28.3 | 2.8 | 1.2 | 2.5 | 2.4 | 46.2 |

Two cores (Galvanized steel wire armoured)

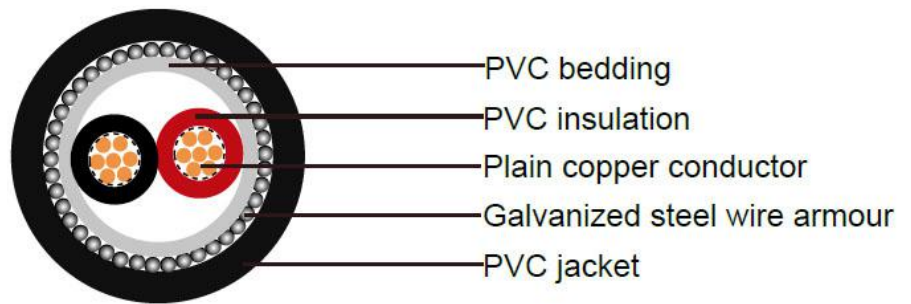

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation thickness | Nominal Inner Covering thickness | Nominal Steel Wire dia. | Nominal Sheath thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|----------------------------------|-------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm | mm | mm |
| 2x2.5 | 1.8 | 0.8 | 1.0 | 0.8 | 1.8 | 14.0 |
| 2x4 | 2.3 | 1 | 1.0 | 1.25 | 1.8 | 16.7 |
| 2x6 | 2.8 | 1 | 1.0 | 1.25 | 1.8 | 17.7 |
| 2x10 | 3.6 | 1 | 1.0 | 1.25 | 1.8 | 19.3 |
| 2x16 | 4.5 | 1 | 1.0 | 1.25 | 1.8 | 21.1 |
| 2x25 | 5.6 | 1.2 | 1.0 | 1.6 | 1.8 | 24.8 |
| 2x35 | 6.7 | 1.2 | 1.0 | 1.6 | 1.8 | 27.0 |
| 2x50 | 8 | 1.4 | 1.0 | 1.6 | 1.9 | 30.7 |
| 2x70 | 9.4 | 1.4 | 1.0 | 2.0 | 2.1 | 34.5 |
| 2x95 | 11 | 1.6 | 1.2 | 2.0 | 2.2 | 39.2 |
| 2x120 | 12.4 | 1.6 | 1.2 | 2.0 | 2.3 | 42.2 |

Contact Us:


E-mail:info@qingzhou-cable.com

Phone/Whatsapp/WeChat:+86 18625503172

www.qingzhou-cable.com

| | | | | | | |
|-------|------|-----|-----|-----|-----|------|
| 2x150 | 13.8 | 1.8 | 1.2 | 2.5 | 2.5 | 47.2 |
| 2x185 | 15.3 | 2 | 1.4 | 2.5 | 2.6 | 51.6 |
| 2x240 | 17.5 | 2.2 | 1.4 | 2.5 | 2.8 | 57.2 |
| 2x300 | 19.5 | 2.4 | 1.6 | 2.5 | 3.0 | 62.8 |
| 2x400 | 22.6 | 2.6 | 1.6 | 2.5 | 3.2 | 70.3 |

Three cores(Galvanized steel wire armoured)

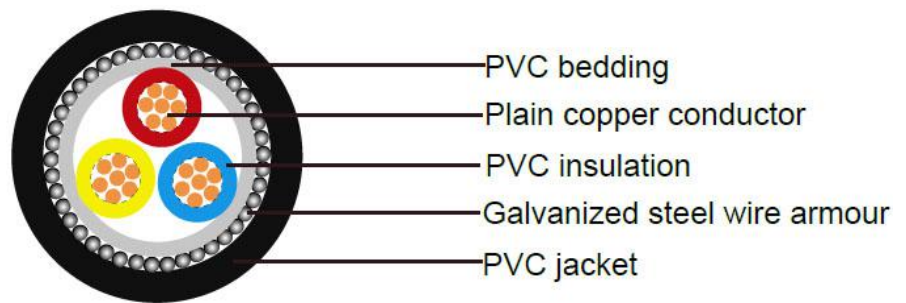

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation thickness | Nominal Inner Covering thickness | Nominal Steel Wire dia. | Nominal Sheath thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|----------------------------------|-------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm | mm | mm |
| 3x2.5 | 1.8 | 0.8 | 1.0 | 0.8 | 1.8 | 14.5 |
| 3x4 | 2.3 | 1 | 1.0 | 1.25 | 1.8 | 17.4 |
| 3x6 | 2.8 | 1 | 1.0 | 1.25 | 1.8 | 18.4 |
| 3x10 | 3.6 | 1 | 1.0 | 1.25 | 1.8 | 20.2 |
| 3x16 | 4.5 | 1 | 1.0 | 1.6 | 1.8 | 22.8 |
| 3x25 | 5.6 | 1.2 | 1.0 | 1.6 | 1.8 | 26.0 |
| 3x35 | 6.7 | 1.2 | 1.0 | 1.6 | 1.9 | 28.5 |
| 3x50 | 8.0 | 1.4 | 1.0 | 2 | 2.0 | 33.3 |
| 3x70 | 9.4 | 1.4 | 1.2 | 2 | 2.1 | 37.0 |

Contact Us:


E-mail: info@qingzhou-cable.com

Phone/Whatsapp/WeChat: +86 18625503172

www.qingzhou-cable.com

| | | | | | | |
|-------|------|-----|-----|------|-----|------|
| 3x95 | 11.0 | 1.6 | 1.2 | 2 | 2.3 | 41.6 |
| 3x120 | 12.4 | 1.6 | 1.2 | 2.5 | 2.4 | 45.9 |
| 3x150 | 13.8 | 1.8 | 1.4 | 2.5 | 2.6 | 50.4 |
| 3x185 | 15.3 | 2 | 1.4 | 2.5 | 2.7 | 54.8 |
| 3x240 | 17.5 | 2.2 | 1.5 | 2.5 | 2.9 | 61.2 |
| 3x300 | 19.5 | 2.4 | 1.6 | 2.5 | 3.1 | 66.8 |
| 3x400 | 22.6 | 2.8 | 1.6 | 3.15 | 3.4 | 76.7 |
| 3x500 | 25.2 | 2.8 | 1.8 | 3.15 | 3.7 | 83.6 |

Three cores+1 (Galvanized steel wire armoured)

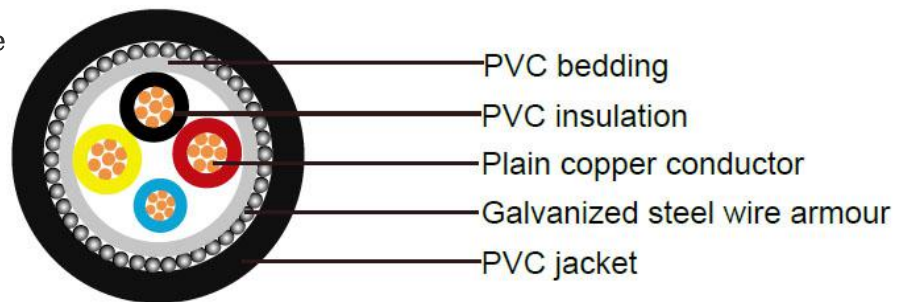


| Nominal Cross Section | Diameter of Conductor (Approx.) | | Nominal Insulation thickness | | Nominal Inner Covering thickness | Nominal Steel Wire dia. | Nominal Sheath thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|-----|------------------------------|-----|----------------------------------|-------------------------|--------------------------|----------------------------|
| | mm | mm | mm | mm | | | | |
| 3x10/6 | 3.6 | 2.8 | 1 | 1 | 1 | 1.25 | 1.8 | 21.9 |
| 3x16/10 | 4.5 | 3.6 | 1 | 1 | 1 | 1.6 | 1.8 | 24.2 |
| 3x25/16 | 5.6 | 4.5 | 1.2 | 1 | 1 | 1.6 | 1.8 | 27.9 |
| 3x35/16 | 6.7 | 4.5 | 1.2 | 1 | 1 | 1.6 | 1.9 | 30.8 |
| 3x50/25 | 8.0 | 5.6 | 1.4 | 1.2 | 1 | 2.0 | 2.0 | 36.4 |
| 3x70/35 | 9.4 | 6.7 | 1.4 | 1.2 | 1.2 | 2.0 | 2.1 | 40.1 |

Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)
[Phone/Whatsapp/WeChat:+86 18625503172](https://www.qingzhou-cable.com)
www.qingzhou-cable.com

| | | | | | | | | |
|-----------|------|------|-----|-----|-----|------|-----|------|
| 3x95/50 | 11.0 | 8.0 | 1.6 | 1.4 | 1.2 | 2.5 | 2.3 | 46.3 |
| 3x120/70 | 12.4 | 9.4 | 1.6 | 1.4 | 1.4 | 2.5 | 2.4 | 50.3 |
| 3x150/70 | 13.8 | 9.4 | 1.8 | 1.4 | 1.4 | 2.5 | 2.6 | 55.0 |
| 3x185/95 | 15.3 | 11.0 | 2 | 1.6 | 1.4 | 2.5 | 2.7 | 60.3 |
| 3x240/120 | 17.5 | 12.4 | 2.2 | 1.6 | 1.6 | 2.5 | 2.9 | 67.0 |
| 3x300/150 | 19.5 | 13.8 | 2.4 | 1.8 | 1.6 | 3.15 | 3.1 | 74.6 |
| 3x400/185 | 22.6 | 15.3 | 2.6 | 2 | 1.8 | 3.15 | 3.4 | 84.1 |
| 3x500/240 | 25.2 | 17.5 | 2.8 | 2.2 | 2 | 3.15 | 3.7 | 91.8 |

Four cores(Galvanized steel wire armoured)

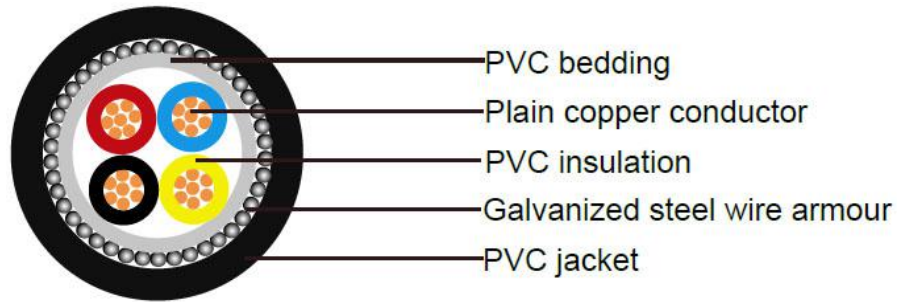

| Nominal Cross Section | Diameter of Conductor (Approx.) | Nominal Insulation thickness | Nominal Inner Covering thickness | Nominal Steel Wire dia. | Nominal Sheath thickness | Overall Diameter (Approx.) |
|-----------------------|---------------------------------|------------------------------|----------------------------------|-------------------------|--------------------------|----------------------------|
| mm ² | mm | mm | mm | mm | mm | mm |
| 4x4 | 2.3 | 1 | 1 | 1.25 | 1.8 | 18.5 |
| 4x6 | 2.8 | 1 | 1 | 1.25 | 1.8 | 19.7 |
| 4x10 | 3.6 | 1 | 1 | 1.25 | 1.8 | 22.3 |
| 4x16 | 4.5 | 1 | 1 | 1.6 | 1.8 | 24.5 |
| 4x25 | 5.6 | 1.2 | 1 | 1.6 | 1.9 | 28.2 |
| 4x35 | 6.7 | 1.2 | 1 | 1.6 | 2.0 | 31.1 |



Contact Us:

[E-mail:info@qingzhou-cable.com](mailto:info@qingzhou-cable.com)

[Phone/Whatsapp/WeChat:+86 18625503172](tel:+8618625503172)

www.qingzhou-cable.com

| | | | | | | |
|-------|------|-----|-----|------|-----|------|
| 4x50 | 8.0 | 1.4 | 1 | 2.0 | 2.1 | 36.7 |
| 4x70 | 9.4 | 1.4 | 1.2 | 2.0 | 2.3 | 40.4 |
| 4x95 | 11.0 | 1.6 | 1.2 | 2.5 | 2.5 | 46.6 |
| 4x120 | 12.4 | 1.6 | 1.4 | 2.5 | 2.6 | 50.6 |
| 4x150 | 13.8 | 1.8 | 1.4 | 2.5 | 2.7 | 55.3 |
| 4x185 | 15.3 | 2 | 1.4 | 2.5 | 2.9 | 60.6 |
| 4x240 | 17.5 | 2.2 | 1.6 | 2.5 | 3.1 | 67.3 |
| 4x300 | 19.5 | 2.4 | 1.6 | 3.15 | 3.4 | 74.9 |
| 4x400 | 22.6 | 2.6 | 1.8 | 3.15 | 3.7 | 84.4 |
| 4x500 | 25.2 | 2.8 | 2 | 3.15 | 3.9 | 92.1 |